


AMADAS INDUSTRIES

M2110 6-Row Peanut Combine

Amadas Industries, the worldwide leader in peanut harvesting machinery, is proud to introduce the next generation of high capacity pull-type peanut Combine the Amadas M2110!

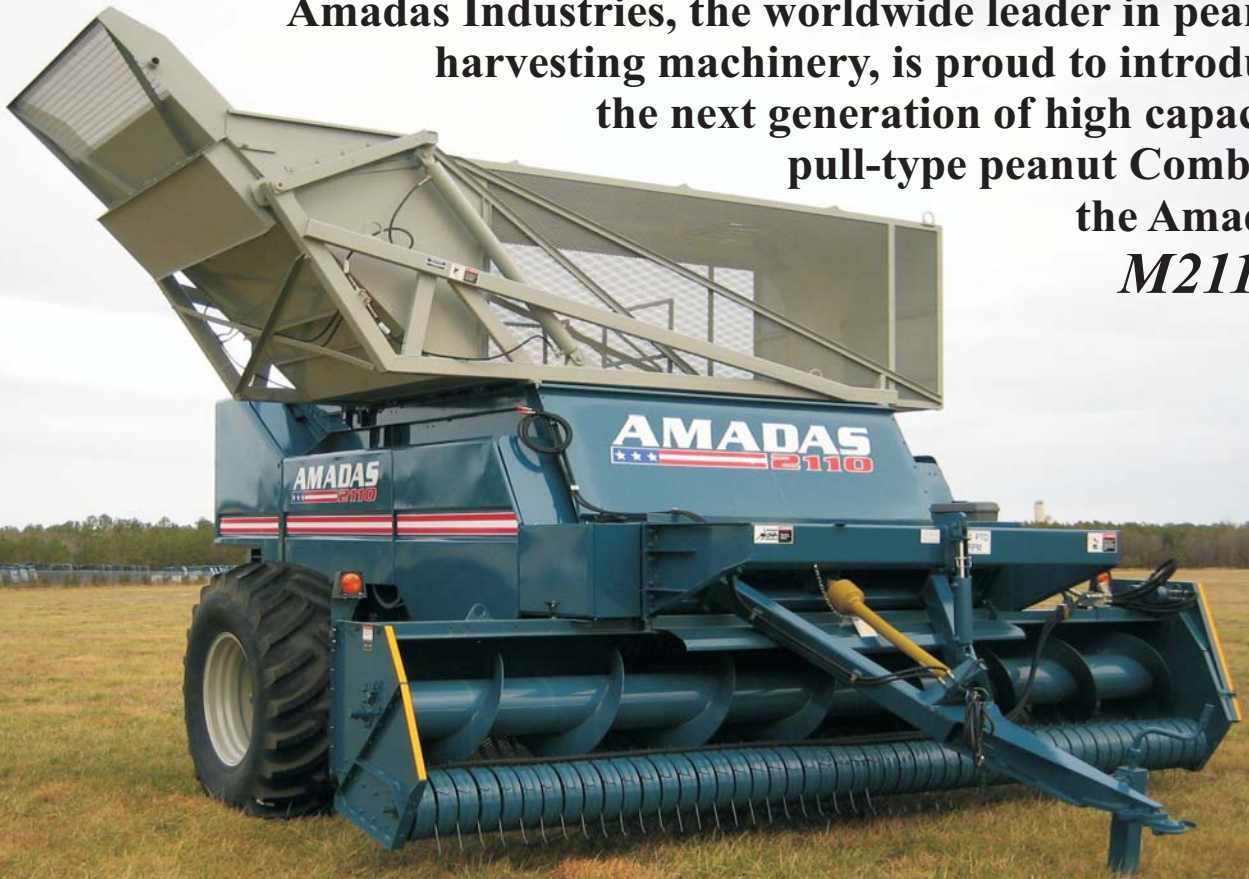

Amadas Peanut Combines, with their patented peanut harvesting technology, stand alone as the largest, highest capacity pull-type combines available. The proven performance of the advanced picking and separating technology of these combines has secured Amadas Industries' position as the leader in the design of innovative large volume, high capacity peanut harvesting technology. The M2110 is the next step in that progression. Amadas Industries remains committed to providing peanut farmers with the highest quality products and to reinforcing our industry leadership position!

**Hydraulically assisted vertical-opening main shields provide easy access to components and drives!
Larger diameter steel stripper for better crop distribution, enhanced separation, and reduced losses!**

Relocated adjustment points for quicker and more convenient access!

Simplified, repositioned, and enhanced drives that improve service life, allow greater access, and increase load carrying capacity!

Redesigned four piece main duct for simple, more economical replacement of wear areas!

Optional automatic hydraulic bin lip extension and secondary dirt trap!


Ladder on left side for more convenient access to basket!

**Increased Harvesting Capacity! Increased Harvesting Efficiency! Reduced Harvesting Costs!
Improved Performance in Tough Harvest Conditions! Reduced Field Loss, Foreign Material & LSK's!
Patented Harvesting Technology!**

AMERICAN MANUFACTURED • ADVANCED DESIGN • ABSOLUTE SERVICE



M2110 6-Row Peanut Combine

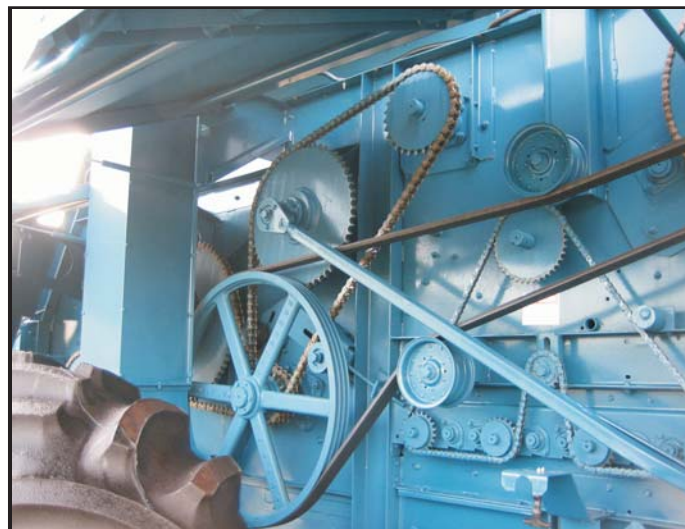

DIMENSIONS / SPECIFICATIONS

Length	25' 6" (7.77 m)
Wheel Base (outside)	16' 6" (5.02 m)
Tire Size	24.5x32 -12 ply (Optional 30.5x32 - 16 ply) (Optional with 15' 3" header only - 20.8 38 14 ply)
Height	13' 10" (4.21 m) (Bin Lip In) - 15' 8" (4.77 m) (Bin Lip Out) - 24' (7.32 m) (Bin Raised)
Dump Height	11' 8" (3.55 m)
Header Width	18' (5.49 m) or 19' (5.79 m) (Standard) - (Optional 15' 3" (4.65 m) for 6 - 30" rows)
Bin Capacity	7,500 lbs (3,410 kg)
Empty Weight	20,000 lbs (9,090 kg)
Inside Working Width	96-1/4" (244.5 cm)
Header Auger & Pick-Up Drive	Hydraulic Variable Speed w/Overload Protection
Picking System	Single Speed Cylinder Drive (Optional two speed) Four -30" (76.2 cm) Diameter Spring-Tooth Picking Cylinders Adjustable Retention Board Adjustable Overhead Stripper Teeth - 2 Sets (Standard) Adjustable Concave Teeth - up to 5 Sets (Optional)
Separation System	Five Retractable Spring-Tooth Walker Separator Cylinders Two-Beater Cylinders 15 Roll-Disc Separator with 14" (35.56 cm) Cross Induction Cleaning Fan
Elevator System	12" (30.5 cm) Diameter Collection Auger to 9-1/2" (24.13 cm) Square Duct Air Lift Supplied by a 28" (71.12 cm) Diameter Centrifugal Elevator Fan
Tongue	Fixed (Side Shift for optional 8 - 30" row setup) Hydraulic Height Adjustable w/Ball Hitch (optional pin hitch)
Reversing Auger (Tractor Hydraulics)	Standard
Remote Header Speed Control	Standard
Remote Elevator Fan Speed Control	Standard
Vine Spreader	Optional
Vine Hold-Down	Optional
Hydraulic automatic bin lip extension and secondary dirt trap	Optional

INDUSTRY LEADER • PROVEN PERFORMANCE • INNOVATIVE DESIGN

www.amadas.com

1100 Holland Road / Suffolk, VA 23434
Telephone (757) 539-0231 / Fax (757) 934-3264

email Address: sales@amadas.com

1701 S. Slappey Blvd. / Albany, GA 31701
Telephone (229) 439-2217 / Fax (229) 439-9343

AMADAS INDUSTRIES whose policy is one of continuous improvement, reserves the right to change specifications design or price without incurring obligation.